ANPING XINGYOU

WIREMESH MANUFACTURERS CO., LTD







Tel: +86-15383793340



WhatsApp: +86-15383793340 WeChat: +86-15383793340



www.broprosper.com cristina@broprosper.com



Australia Temporary Fence

Australia temporary fence is a kind of temporary fence manufactured in accordance with Australian Standard AS 4687-2007 Temporary Fencing and Hoardings and is designed to withstand harsh Australian climates.


It is constructed by galvanized welded wire mesh and round tubes, which provides a smooth surface with excellent rust & corrosion resistance performance and a rigid structure that works well for years.

Australia temporary fence is an ideal choice for preventing unauthorized access and is widely used in infrastructure, civil, industrial, commercial & demolition sites, construction sites, accident spots and a wide range of major public events.






- A Height: 1800 mm, 2100 mm, etc.
- **B Width:** 2100 mm, 2400 mm, 2900 mm, etc.
- **Wire Diameter:** 2.5 mm, 3.0 mm, 3.5 mm, 3.8 mm, 4.0 mm, 5.0 mm
- Mesh Opening: 50 mm × 100 mm, 50 mm × 150 mm, 60 mm × 150 mm, 75 mm × 100 mm, 75 mm × 150 mm
- Frame: Round pipe (outside diameter 32 mm, 38 mm, 40 mm, 42 mm, 48 mm)
- F Clamp: metal clamp
- **G Feet:** 580 mm x 245 mm x 130 mm, 600 mm x 220 mm x 150 mm

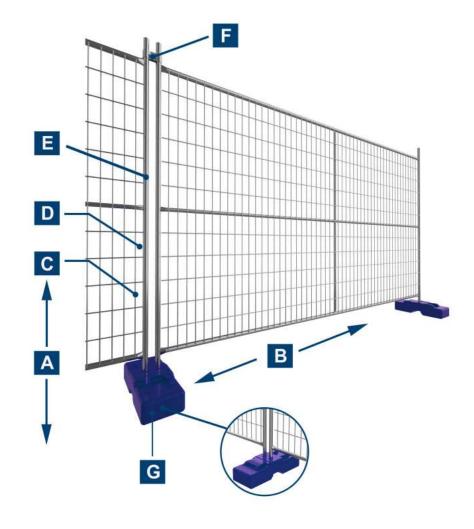

> hot dipped galvanized before welding or hot dipped galvanized after welding



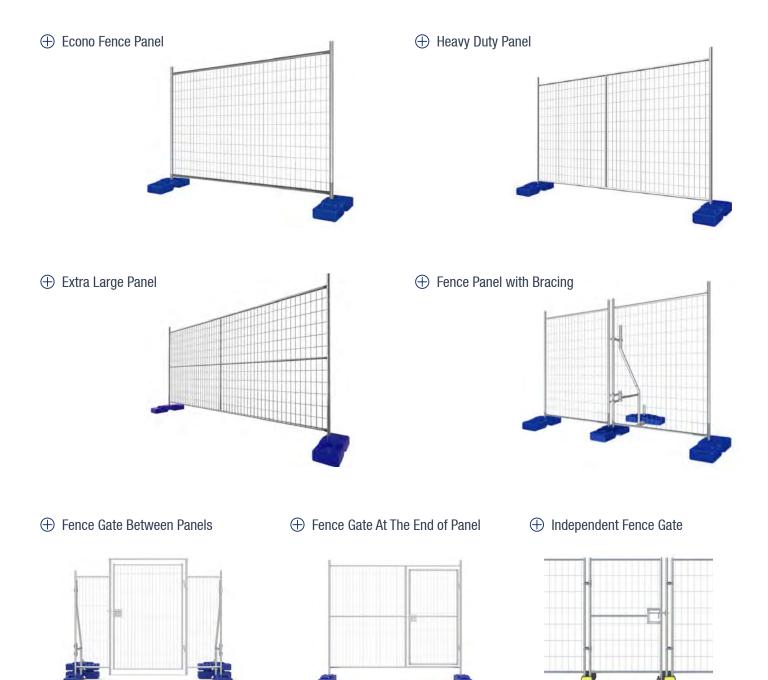



The main component of Australia temporary fence is welded fence panels, panel clamps and plastic feet as shown below.

Fence Panels

Fence panels



⊕ Fence panel installation



Plastic Feet

Plastic feet



Plastic feet installation



Panel Clamps

⊕ Fence clamps



Fence clamp installation



Optional Accessories

Braces & Shade Cloth

Braces



Shade cloth



Handrails & Dog Bars

⊕ Handrails



Dog bars



Razor Wire & Barbed Wire

Razor wires



Barbed Wire





Production Flow Chart

Step 1

Raw materials (galvanized steel wires)

Step 2

Raw materials (galvanized steel pipes)

Step 3

Steel wire straightening and cutting

Step 4

Wire mesh welding

Step 5

Pipe cutting

Step 6

Fence frame welding

Step 7

Temporary fence panel welding

Step 8

Temporary fence panel polishing

Step 9

Temporary fence panel spraying

Step 10

Finished Australia temporary fence panels





















Package & Delivery



FENCE PANEL PACKAGE



PLASTIC FEET PACKAGE



FENCE DELIVERY





Features

⊕ Smooth and elegant appearance

The surface is well treated to eliminate all burrs for safe installation and removal.

⊕ Solid and strong base support

The concrete inside the plastic feet provide a solid and strong base support for the temporary fence.

Full hand welding technology

This full welding technology provides a strong structure to extend its service life and prevent breakage.

⊕ Easy installation and removal

All assemble and disassemble work can be done by one single person without digging holes, which saves both time and labor.

Excellent applicability

It can be placed on a variety of grounds including soil, sand, asphalt and concrete surfaces.

Great cost effective

It can be installed and removed for many times and for different uses.

Application

Australia temporary fence is widely used in infrastructure, civil, industrial, commercial & demolition sites, construction sites, accident spots and a wide range of major public events.



GARDENS



ROADSIDE



BASKETBALL COURT



PARKS



CONSTRUCTION SITES



INDUSTRIAL SITES



ANPING XINGYOU

WIREMESH MANUFACTURERS CO., LTD



500 meter east of Datongxin Village, Donghuangcheng Town, Anping County, Hengshui City, Hebei Province, China.



Tel: +86-15383793340



WhatsApp: +86-15383793340 WeChat: +86-15383793340



www.broprosper.com cristina@broprosper.com

